




NanoTek
ISO 3-4 (Class 1-10)

Valutek Pressure-Heat Sealed Polyester Wiper

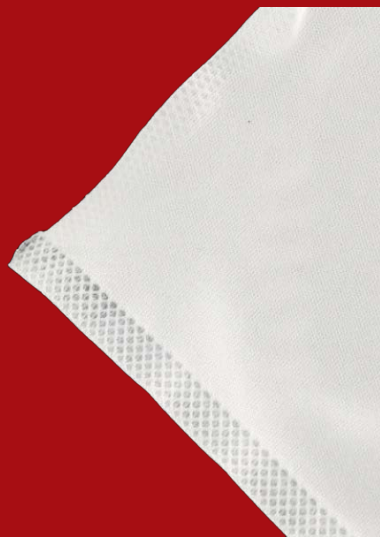

Part Number: VTPNWPHS

Valutek's pressure-heat sealed polyester wiper is made from 100% continuous filament polyester in a double-knit, no-run, interlock pattern with pressure-heat sealed edges.

This wiper is exceptionally clean and offers high absorbency with extremely low levels of particulate and extractable counts. It is laundered and packaged in a cleanroom.

All Valutek wipers undergo testing and are manufactured in ISO-compliant facilities under Valutek's inspection and strict process control to uphold Valutek quality standards and meet product specifications.

Features

- 100% continuous filament, double-knit polyester fiber
- Pressure-heat sealed edge for lowest available fiber contamination
- High absorbency and abrasion resistance
- Chemically compatible with IPA, Acetone and other common solvents
- Ultra low levels of particulate and extractable counts

Application

As part of the Valutek Nanotek product family, this product is recommended for use in cleanroom Class 1-10 (ISO 3-4) critical environments.

It is designed for critical processing applications that require the highest level of contamination control.

Additionally, it is commonly used for cleaning medical device products, applying, removing, cleaning, and disinfecting solutions. It can be steam autoclaved for aseptic environments and is also utilized for tasks like flat panel, optics cleaning, and chips multiprocessing (CMP).

Pre-Saturated Option:

This wiper is available with customized saturated chemistries to meet your specific application requirements.

Size and Packaging



Part Number	Size	Packaging
VTPNWPHS-99	9" x 9" 23 cm x 23 cm	150 ea/bag, 8 bags/case, 1200 ea/case

- All wipers are packed in double poly bags, vacuum sealed, flat packed in carton boxes and with a carton liner.
- Critical environment compatible.
- All wipers are **lot traceable** with retention samples held in **Quality Control for 36 months** from manufacturing.



Gloves



Wipers



Apparel



Adhesive Mats



Cleaning & Maintenance



Documentation



Glove Liners



ESD



Valutek Pressure-Heat Sealed Polyester Wiper

Part Number: VTPNWPMS

VTPNWPMS Technical Performance

Attribute	Value	Units	Test Method
Basis Weight	135 ± 5	g/m ²	TAPPI T-410
Absorbency			
Sorptive Efficiency	2	mL/g	
Sorptive Capacity	310	mL/m ²	IEST-RP.CC004.3, Sec 8.1/Sec 8.2
Sorptive Rate	<1	second	
Particle Counts			
LPC: ≥0.5 µm	<7	10 ⁶ X particles/m ²	IEST-RP.CC004.3, Sec 6.1.3/Sec 6.2.1
Non Volatile Residue (NVR)			
DI Water Extractant	0.02	g/m ²	IEST-RP.CC004.3, Sec 7.1.2
IPA Extractant	0.1	g/m ²	
FTIR			
Silicone Oil, Amide & DOP	Not Detectable		IEST-RP.CC004.3, Sec 7.2.1
Extractable Counts (Ions)			
Sodium(Na ⁺)	<0.2 ppm	Fluoride(F)	<0.2 ppm
Potassium(K ⁺)	<0.2 ppm	Nitrite(NO ₂ ⁻)	<0.2 ppm
Calcium(Ca ²⁺)	<0.5 ppm	Bromide(Br ⁻)	<0.2 ppm
Magnesium(Mg ²⁺)	<0.2 ppm	Phosphate(PO ₄ ³⁻)	<0.3 ppm
Ammonium(NH ₄ ⁺)	<0.3 ppm	Chloride(Cl ⁻)	<0.2 ppm
Nitrate(NO ₃ ⁻)	<0.3 ppm	Sulfate(SO ₄ ²⁻)	<0.2 ppm

IEST-RP.CC004.3, Sec 7.2.2

***Note:** Technical data listed reflects upper/lower limits. Certificates of Analysis available upon request for actual lot-to-lot test data. 36 month lot trend analysis available upon request



Valutek WEST
Phoenix, AZ - USA

Valutek EAST
Albany, NY - USA

Valutek ASIA
Penang - Malaysia

1.800.763.1250

orderdesk@valutek.com

valutek.com

INNOVATIVE SOLUTIONS FOR CRITICAL ENVIRONMENTS